

Outdoor UTP (U/UTP) cable 4x2x0,54, Category 6, 400 MHz, PE

P/N: KE400U23OUT

500 m on reels

P/N: KE400U23OUT-RLX

305 m in a box




1
Gigabit

Cat. 6

400
MHz

OUTDOOR

PE

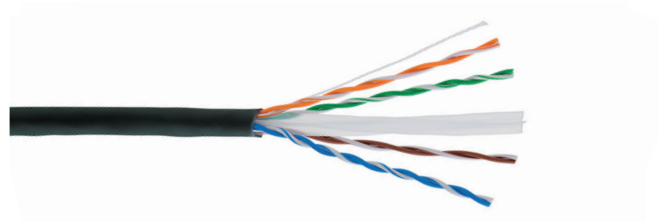

Features

- unshielded cable with pairs separated by a cross filler, PE sheath
- resistant to moisture, water and UV radiation
- enables transmission of all high-speed protocols including 1000BASE-T
- tested in a bandwidth up to 400 MHz
- not shielded against electromagnetic interference

Application

- primary (Campus), secondary (Riser), tertiary (Horizontal)
- IEEE 802.3: 10BASE-T; 100BASE-TX; 1000BASE-T
- IEEE 802.5: 16 MB; ISDN; TPDDI; ATM

Construction

Conductor	bare copper wire, 0,54 mm
Insulation	polyethylene, Ø 0,93 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Sheath	UV resistant PE, black RAL 9005
Outer cable diameter	6 mm

Mechanical properties

Min. bending radius	installation	48 mm
	operation	24 mm
Temperature range	installation	0 °C to +50 °C
	operation	-20 °C to +60 °C
Max. tensile load		100 N (cca 10 kg)

Electrical properties at 20°C

Loop resistance	—	≤ 176 Ω/ km
Resistance unbalance	—	≤ 2 %
Insulation resistance	(500 V)	≥ 5 000 MΩ x km
Capacity	at 800 Hz	nom. 48 nF/ km
Capacity unbalance	(pair/ground)	≤ 1500 pF/ km
Characteristic impedance	at 100 MHz	(100 ± 5) Ω
Nominal velocity of propagation (NVP)	—	cca 69 %
Propagation delay	Nominal	≤ 535 ns/ 100 m
Delay skew	Nominal	≤ 45 ns/ 100 m
Test voltage	(DC, 1 min) core/core	1 000 V

Transmission properties at 20°C

f (MHz)	Attenuation (dB/100m)		NEXT (dB min)		PS-NEXT (dB min)		ACR (dB/100m)		PS-ACR (dB/100m)		ELFEXT (dB/100m)		PS-ELFEXT (dB/100m)		Return loss (dB)
	max.	nom.	min.	nom.	min.	nom.	min.	nom.	min.	nom.	min.	nom.	min.	nom.	
1,0	2,1	1,9	74,0	78,0	72,0	75,0	72,0	76,1	70,0	73,1	68,0	82,0	65,0	80,0	20,0
4,0	3,8	3,8	65,0	69,0	63,0	66,0	61,2	65,2	59,2	62,2	56,0	70,0	53,0	68,0	23,0
10,0	6,0	6,0	59,0	63,0	57,0	60,0	53,0	57,0	51,0	54,0	48,0	62,0	45,0	60,0	25,0
16,0	7,6	7,6	56,0	60,0	54,0	57,0	48,4	52,3	46,4	49,3	44,0	58,0	41,0	56,0	25,0
20,0	8,5	8,5	55,0	59,0	53,0	56,0	46,5	50,0	44,5	47,0	42,0	56,0	39,0	54,0	25,0
31,2	10,7	10,7	52,0	56,0	50,0	53,0	41,3	45,0	39,3	42,0	38,0	52,0	35,0	50,0	23,6
62,5	15,5	15,1	47,0	51,0	45,0	48,0	31,5	36,0	29,5	33,0	32,0	46,0	29,0	44,0	21,5
100,0	19,9	19,1	44,0	48,0	42,0	45,0	24,1	28,9	22,1	25,9	28,0	42,0	25,0	40,0	20,1
125,0	22,5	21,3	43,0	47,0	41,0	44,0	20,5	25,2	18,5	22,2	26,0	40,0	23,0	38,0	19,5
155,5	25,4	23,8	42,0	45,0	40,0	42,0	16,6	21,3	14,6	18,3	24,0	38,0	21,0	36,0	18,8
175,5	27,1	25,3	41,0	44,0	39,0	41,0	13,9	19,1	11,9	16,1	23,0	37,0	20,0	35,0	18,4
200,0	29,2	27,0	40,0	44,0	38,0	41,0	10,8	16,5	8,8	13,5	22,0	36,0	19,0	34,0	18,0
250,0	33,0	32,0	38,0	42,0	36,0	39,0	5,0	10,0	2,0	7,0	20,0	34,0	17,0	32,0	17,3
300,0		36,1		41,0		38,0		4,8		1,8		32,0		30,0	
400,0		41,7		39,0		36,0		-2,7		-5,7		30,0		28,0	