

19" server demountable cabinets RZA

P/N: RZA-42-L81-BAX-N1-OZA

P/N: RZA-42-A81-BAY-N1-OZA


Features

- screwed construction with IP20 protection
- partial or complete dismantling enables installation to places difficult to reach
- removable and lockable side panels and rear cover enable an easy access to the installed devices
- front, central and rear vertical rails are continuously adjustable
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- breakout-type blanking panels for fan units are located in the top and bottom of the cabinet
- nivelation feet (standard)
- option to order castors, the specific type of castors must be consulted with regard to the weight of the rack
- base with filter RAB-PO-XXX-XD, RAC-PO-XXX-XD the system enables sliding vertical rails installation in a span of 19", 21" or 23"
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1 pc)
- set of M6 screws and captive nuts (16 pcs)



Color black RAL9005

Surface structured, matt

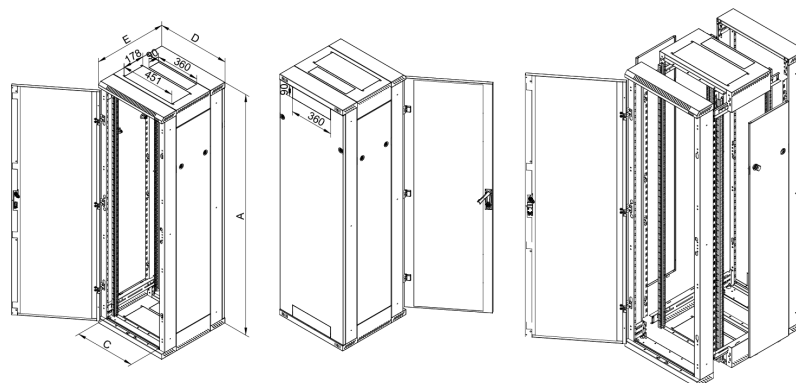

Features

- perforated single door with air permeability of 80 %



Parameters L81

Width 800 mm, depth 1000 mm

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
42U P/N: RZA-42-L81-BAX-N1-OZA	1970	1868	687	800	1000	118,2	800

Features

- single door, hardened smoked glass



Parameters A81

Width 800 mm, depth 1000 mm

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
42U P/N: RZA-42-A81-BAY-N1-OZA	1970	1868	687	800	1000	123,2	800